


# RECOMMENDED MOUNTING INSTRUCTIONS

## For Light Series - 112HR, 212

**\*\*\*Proper installation of this product is the sole responsibility of the installer\*\*\***

1. Locate a flat surface on vehicle and position light parallel to the ground.
2. In the interior of the vehicle, loosen upholstery at mounting location.
3. Use center-punch if available to start four (4) mounting holes - See diagram below.  
Drill the four holes out using a 1/4" drill bit.
4. Insert wire through center hole and position mounting bolts in holes.
5. Connect **red wire** to power (+) and **black wire** (if provided) to ground (-)
6. If black wire is not provided, light is grounded to a metal surface thru the mounting bolts
6. Follow wiring instructions for a switch if provided ----- TEST LIGHT
7. Install washers and hex nuts and tighten down mounting bolts until gasket seals light to the surface of the vehicle.
8. Replace upholstery to original position.

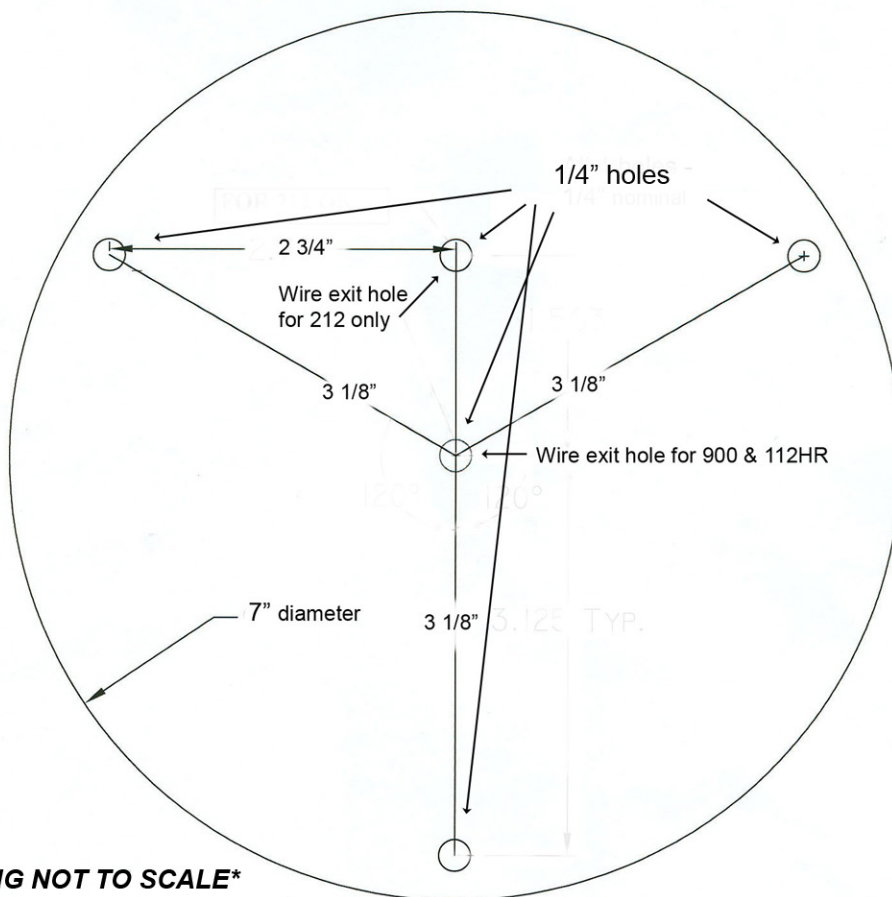

**\*\*\*\*\*CLEAN DOME WITH WATER ONLY\*\*\*\*\***

If you have purchased a magnet mount light be sure to check the owners manual for lighter/auxilliary socket maximum amperage rating before plugging in any warning light.