


RECOMMENDED MOUNTING INSTRUCTONS

For Light Series - 800, 850, 2000, 2500

*****Proper installation of this product is the sole responsibility of the installer*****

1. Locate a flat surface on vehicle and position the light parallel to the ground.
2. In the interior of the vehicle, loosen upholstery at mounting location.
3. Use center-punch if available to start three (3) mounting holes using the diagram below as a template. Drill the three holes out using a 1/4" drill bit.
4. Insert wire through center hole and position mounting bolts in holes.
5. Connect **red wire** to power (+) and **black wire** (if provided) to ground (-)
6. If black wire is not provided, light is grounded to a metal surface thru the mounting bolts
6. Follow wiring instructions for a switch if provided ----- TEST LIGHT
7. Install washers and hex nuts and tighten down mounting bolts until gasket seals light to the surface of the vehicle.
8. Replace upholstery to original position.

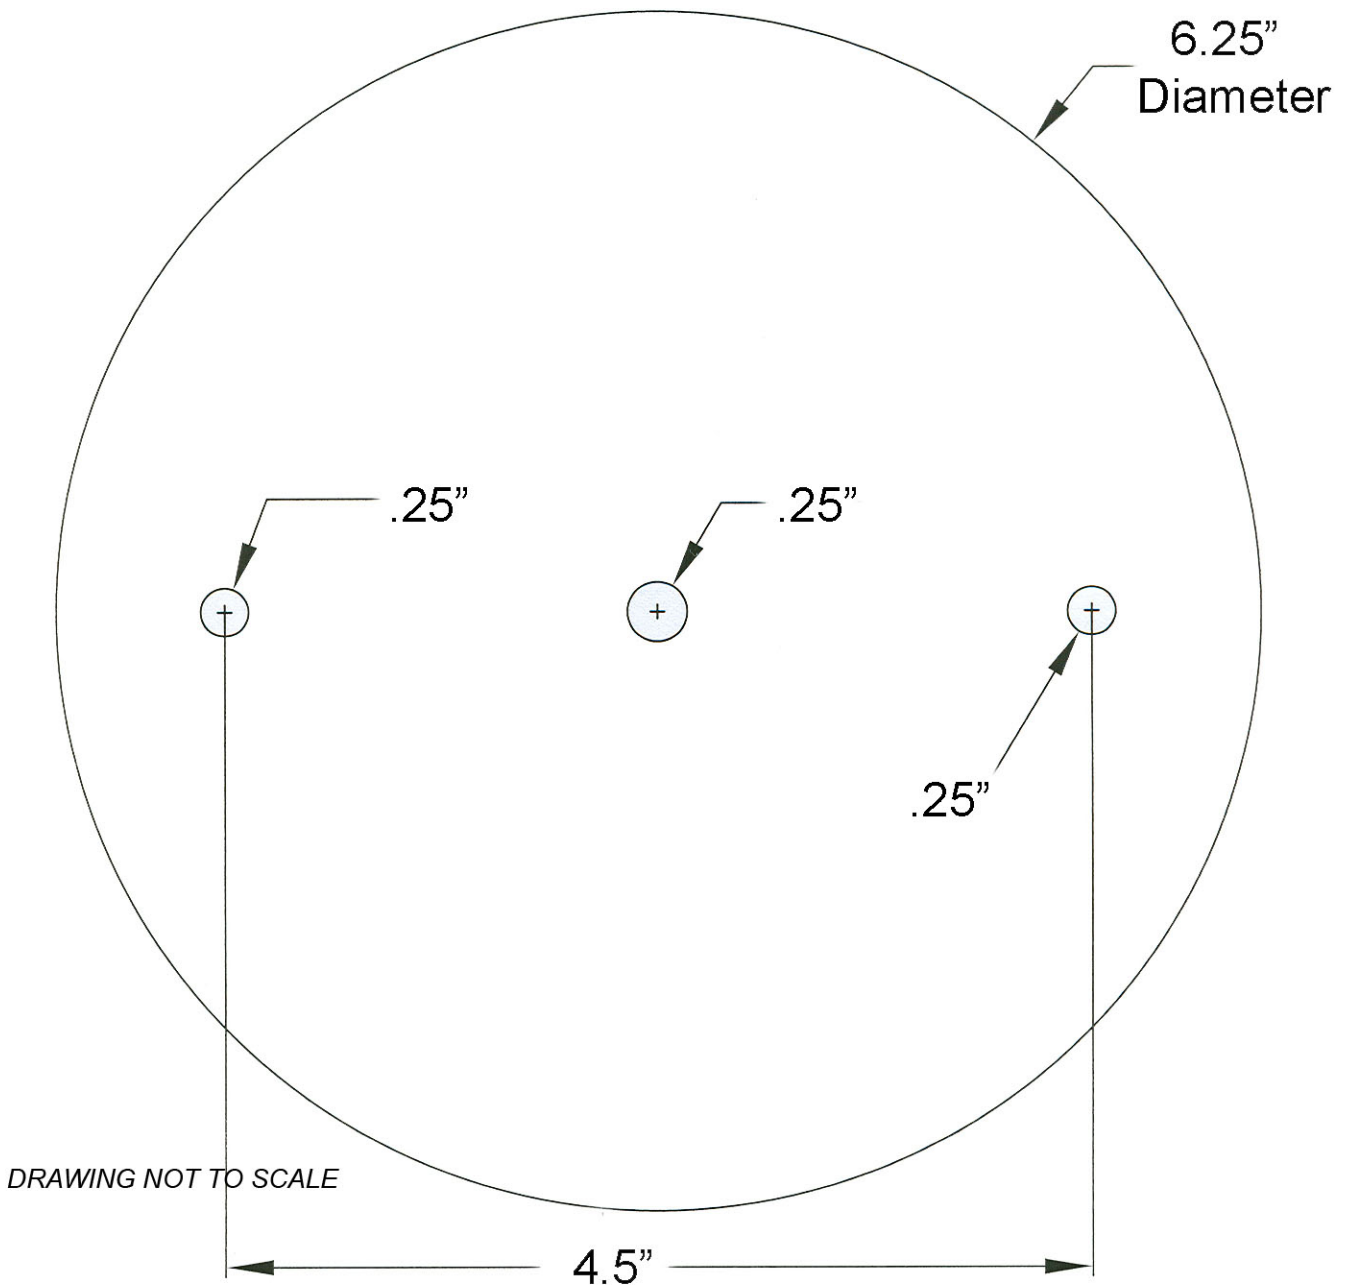

*******CLEAN DOME WITH WATER ONLY*******