


RECOMMENDED MOUNTING INSTRUCTIONS

For Light Series - 900

*****Proper installation of this product is the sole responsibility of the installer*****

1. Locate a flat surface on vehicle and position light parallel to the ground.
2. In the interior of the vehicle, loosen upholstery at mounting location.
3. Use center-punch if available to start four (4) mounting holes - See diagram below.
Drill the four holes out using a 1/4" drill bit.
4. Insert wire through center hole and position mounting bolts in holes.
5. Connect **red wire** to power (+) and **black wire** (if provided) to ground (-)
6. If black wire is not provided, light is grounded to a metal surface thru the mounting bolts
6. Follow wiring instructions for a switch if provided ----- TEST LIGHT
7. Install washers and hex nuts and tighten down mounting bolts until gasket seals light to the surface of the vehicle.
8. Replace upholstery to original position.

All DFS900 series lights now include an internal solid state, self resetting fuse. The vehicle circuit providing power to this light should be fused for a minimum of 7.5 A per light. If more than one unit is used on the same circuit, the circuit should be fused for an additional 4 A minimum per unit.

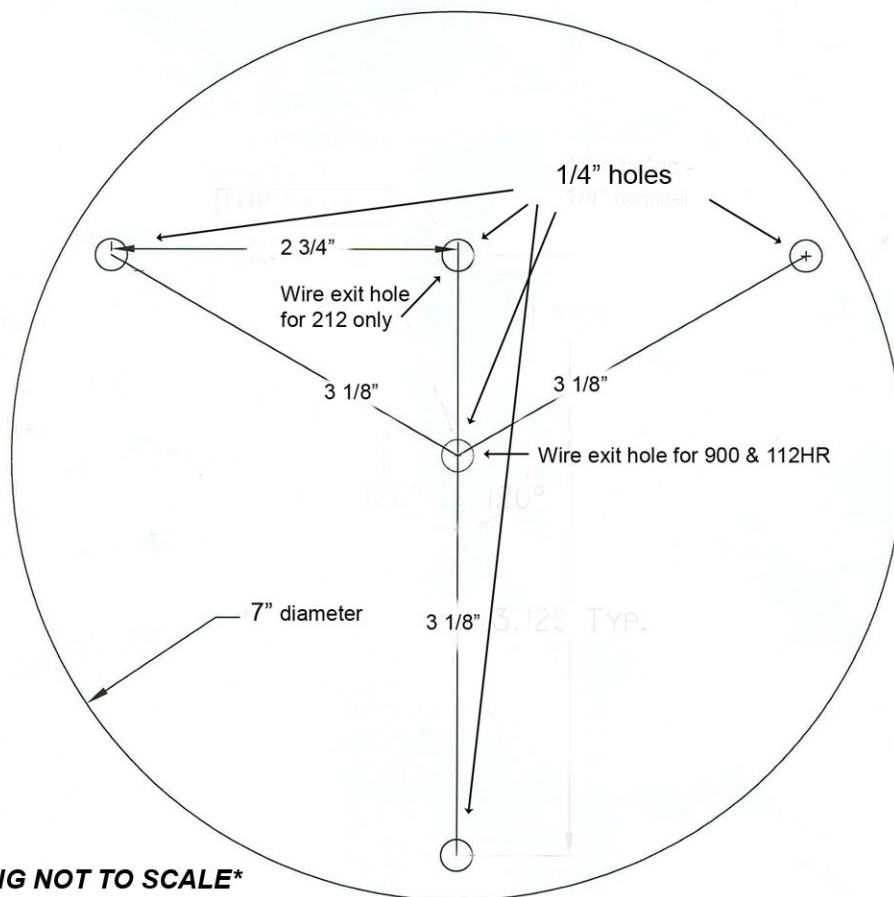

*******CLEAN DOME WITH WATER ONLY*******

If you have purchased a magnet mount light be sure to check the owners manual for lighter/auxilliary socket maximum amperage rating before plugging in any warning light.